




Please complete and return form to
 sales@garrardwindows or send by fax on
 01296 668048

Company Name: _____
 Job Reference: _____
 Preferred Delivery Date: _____
 Site address if required: _____

Width: _____
 Length: _____


Elevate Min & Max Sizes	Min	Max
External Upstand Length (mm):	1050	5400
External Upstand Width (mm):	750	2100

Kits are supplied with a minimum ridge length of 300mm



Tick Box of Required Roof Colour All colours Foiled Finish UOS	External Colour							
	White (substrate):	Golden Oak:	Rosewood:	Black:	7016 Grey:	Irish Oak:	White:	Cream:
White:								
Golden Oak:								
Rosewood:								
7016 Grey:								

Additional Comments: _____

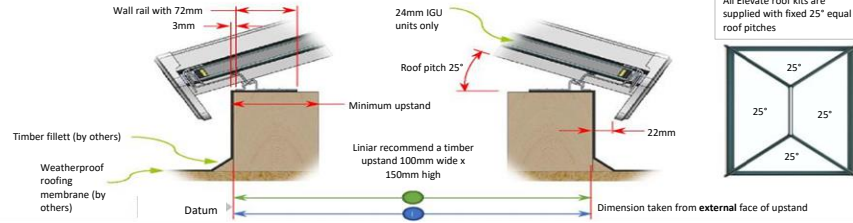

Roof kit designs will be supplied on the design configurations below. All roofs will feature no vents UOS.

Key:

Blue shaded colour = 4.16-4mm glass(20kg/m²)

0 Value = Number of Transoms (0-3)

Roof vent feasibility is subject to the proposed roof width and transom centres. Foiled vent options are no longer available. Coloured vents are supplied in a sprayed finish

External Upstands Lengths (mm)

	External Upstand Width (mm)					
	Up to 600	Up to 900	Up to 1200	Up to 1500	Up to 1800	Up to 2100
Up to 900	0	N/A	N/A	N/A	N/A	N/A
Up to 1200	0	0	N/A	N/A	N/A	N/A
Up to 1500	0	0	0	N/A	N/A	N/A
Up to 1800	0	0	0	0	N/A	N/A
Up to 2100	0	0	0	0	1	N/A
Up to 2400	0	0	0	0	1	1
Up to 2700	1	1	1	1	1	1
Up to 3000	1	1	1	1	1	1
Up to 3300	1	1	1	1	2	2
Up to 3600	1	1	1	1	2	2
Up to 3900	1	1	1	1	2	2
Up to 4200	1	1	1	1	2	2
Up to 4500	1	1	1	2	2	3
Up to 5100	1	1	1	2	2	3
Up to 5400	2	2	2	2	3	3
Up to 5400	2	2	2	3	3	3

0 Transoms	1 Transom	2 Transoms	3 Transoms
No roof vent options available	No roof vent options available	Include 1 Roof Vent: _____ Include 2 Roof Vents: _____	Include 2 Roof Vents: _____ Include 4 Roof Vents: _____

All Elevate glazed roof kit widths up to 2100mm will be supplied in 4-16-4mm glazing (@25kg/m²)

Tick glazing type required	Active Sunshade		
	Active Sunshade Blue	Neutral	Active Clear
Glass Spec:	4mm Pilkington Sunshade Blue 16mm Warmedge/Argon 4mm Optitherm S1	4mm Pilkington Sunshade Neutral 16mm Warmedge/Argon 4mm Optitherm S1	4mm Pilkington Active Clear 16mm Warmedge/Argon 4mm Optitherm S1
Solar Heat Rejection:	80%	68%	N/A
1.2 U-value:	_____	_____	_____
1.0 U-value:	_____	_____	_____

Roof Vent Accessories

Brass effect (gold) 1m pole:	_____
Chrome 1m pole:	_____
Electric Motor:	_____
Rocker Switch (single):	_____
Rain Check:	_____
Full Climate Control:	_____