

VISOFOLD 2000 Aluminium Bi-fold Doors

Please tick: Order [] Quote []

YOUR CONTACT DETAILS

Company Name:

Address:

Postcode:

Tel:

Fax:

Delivery Address:

Postcode:

SINGLE COLOUR

White []

Other []

RAL No.:

DUAL COLOUR

Internal RAL No.:

External RAL No.:

FRAME SIZES

Width (mm)

Height (mm)

Note: You must allow 10mm tolerance between frame and opening size

CILL Included in overall frame height (cill height is 25mm)

150mm []

190mm []

No Cill []

HINGE COLOUR

White []
Matched []

Black []

Colour

D-HANDLE/ HINGE REQUIRED Yes []
No []

Date required:

Your ref/order No.:

OPENING CONFIGURATION

Inward []

Outward []

DELIVERY OPTION

Fully assembled []

Kit form []

Glazed (full spec inc spacer bar colour) []

Unglazed []

BOTTOM TRACK DETAIL (see overleaf for details)

Standard outer frame 51.5mm []

Low threshold 12mm (Satin anodised only & not weather rated) []

DEEP BOTTOM RAIL []

DRAINAGE REQUIRED

Face []

Concealed []

None []

MAIN HANDLE COLOUR

White []
Chrome []

Black []

Gold []

Matt Silver []

Colour Matched []

SHOOTBOLT HANDLE COLOUR

White [] Black [] Chrome []

7016 Grey [] Matt Silver []

Colour Matched []

HEAD PACKER

Included in height []


MAGNETIC PANEL CATCH []

TRICKLE VENTS (in 42mm head packer)

Yes []

FRAME WIDTH

Top Track

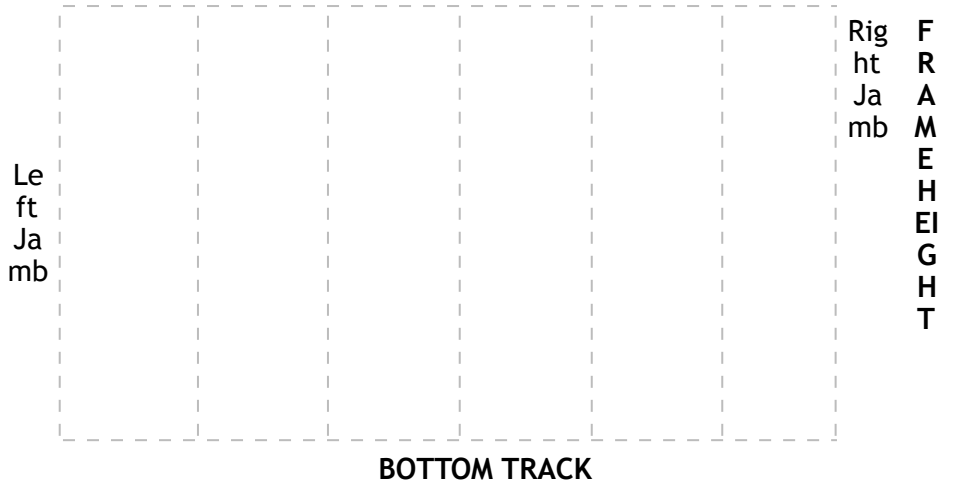

Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from the outside. Mark along the arrows the direction that each panel has to travel.

If you have 2 swing panels, indicate on this drawing which panel you would like to open first (with "FIRST")