

# VISO FOLD 6000 Aluminium Bi-fold Doors

Please tick: Order [ ]      Quote [ ]

## YOUR CONTACT DETAILS

Company Name: \_\_\_\_\_  
Address: \_\_\_\_\_  
\_\_\_\_\_  
Postcode: \_\_\_\_\_  
Tel: \_\_\_\_\_ Fax: \_\_\_\_\_  
Delivery Address: \_\_\_\_\_  
\_\_\_\_\_  
Postcode: \_\_\_\_\_

## SINGLE COLOUR

White [ ]      Other [ ]  
RAL No.: \_\_\_\_\_

## DUAL COLOUR

Internal RAL No.: \_\_\_\_\_ External RAL No.: \_\_\_\_\_

## FRAME SIZES

Width (mm) \_\_\_\_\_  
Height (mm) \_\_\_\_\_

Note: You must allow 10mm tolerance between frame and opening size

## CILL

 Included in overall frame height (cill height is 25mm)

150mm [ ]      16mm Drainage tray [ ]  
190mm [ ]      No cill (only if internal door) [ ]

## HINGE COLOUR (inc. D-HANDLE)

White [ ]      Colour Matched [ ]  
Black [ ]      Black (with chrome D) [ ]

## HEAD PACKER

42mm [ ]  
Included in height [ ]

## TRICKLE VENTS (in 42mm head packer)

Yes [ ] *Please draw position on grid*  
Quantity 1 [ ] 2 [ ] 3 [ ]

## MAGNETIC PANEL CATCH

Chrome [ ]      Colour Matched [ ]

Date required:

Your ref/order No.:

## OPENING CONFIGURATION

Inward [ ]      Outward [ ]

## DELIVERY OPTION

Fully assembled [ ]  
Kit form (must be if over 5100mm) [ ]  
Glazed (full spec inc spacer bar colour) [ ]  
Unglazed [ ]

## SASH OPTION (see overleaf for details)

Standard [ ]  
Heritage type (dummy transom available) [ ]

## BOTTOM TRACK DETAIL (see overleaf for details)

Standard outer frame 55mm [ ]  
175mm Integrated cill/threshold [ ]

## DRAINAGE REQUIRED

Concealed [ ]  
None (only if internal door) [ ]

## MAIN HANDLE COLOUR

White [ ]      Black [ ]      Chrome [ ]  
Gold [ ]      Satin Silver [ ]      Colour Matched [ ]  
Brushed Silver L/L (Hoppe) [ ]  
Brushed Silver separate handle & escutcheon VBH [ ]

## SHOOTBOLT HANDLE


Standard [ ]  
Flush [ ] (must be flush if you have an even amount of doors  
all sliding one way - **outside access not available**)

## SHOOTBOLT HANDLE COLOUR

White [ ]      Black [ ]      Chrome [ ]  
Brushed Silver [ ]      Colour Matched [ ]      Gold [ ]


Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from the outside. Mark along the arrows the direction that each panel has to travel.

If you have 2 swing panels, indicate on this drawing which panel you would like to open first (with "FIRST")

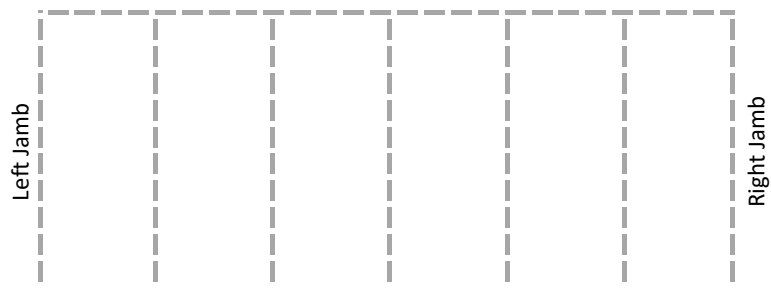


Maximum sash size 1000mm x 2200mm  
Minimum recommended sash size 700mm x 1775mm

**DV614**  
Outer Frame  
82

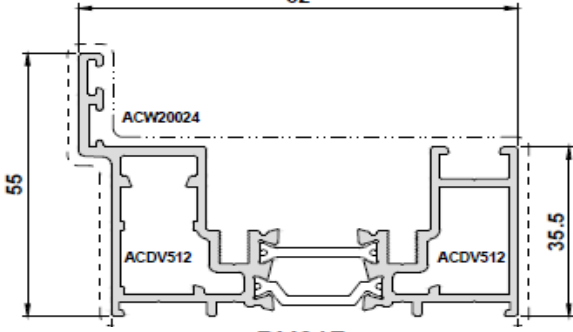

**DV617**  
Flat Outer Frame  
82

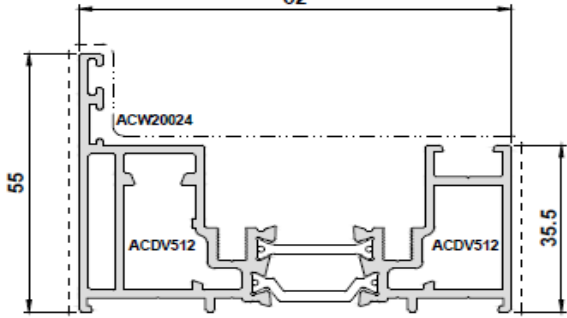


**DV676**

Cill Threshold

Use With DV617 ONLY


OPEN OUT ONLY

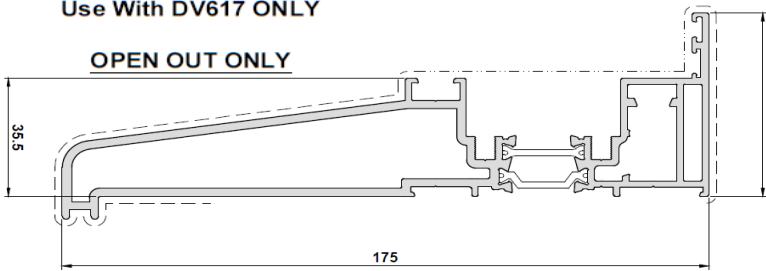

**DV622**


Square Bi-Fold Sash

**STANDARD SASH**

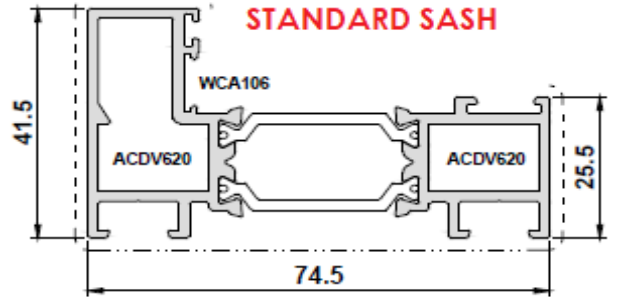


Heritage Bi-Fold Sash

**HERITAGE SASH**

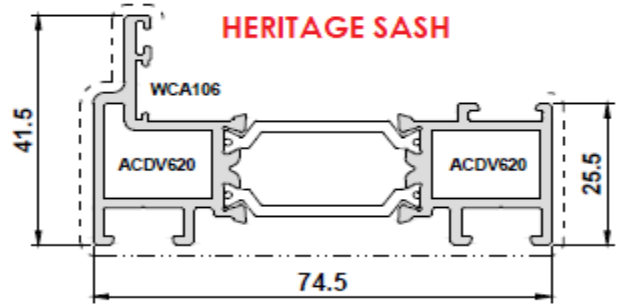


**DV634**

Heritage Bi-Fold Transom

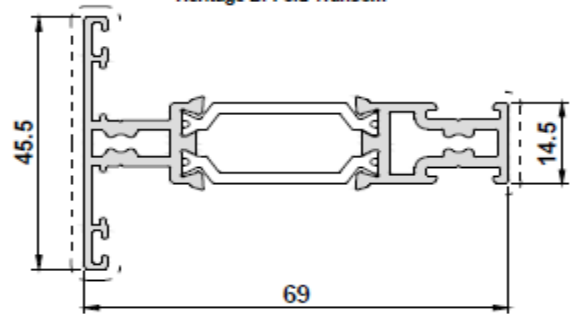

**ETC157**

150mm Concealed Drainage Cill

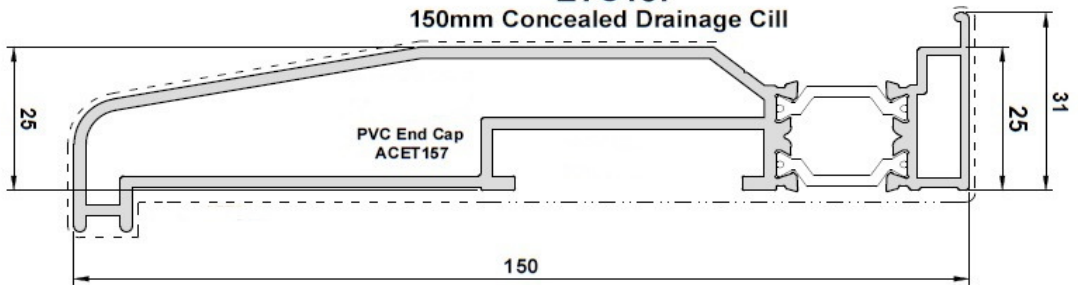

**ETC158**

190mm Concealed Drainage Cill

